




■ G15A□

1Bar = 0,1MPa

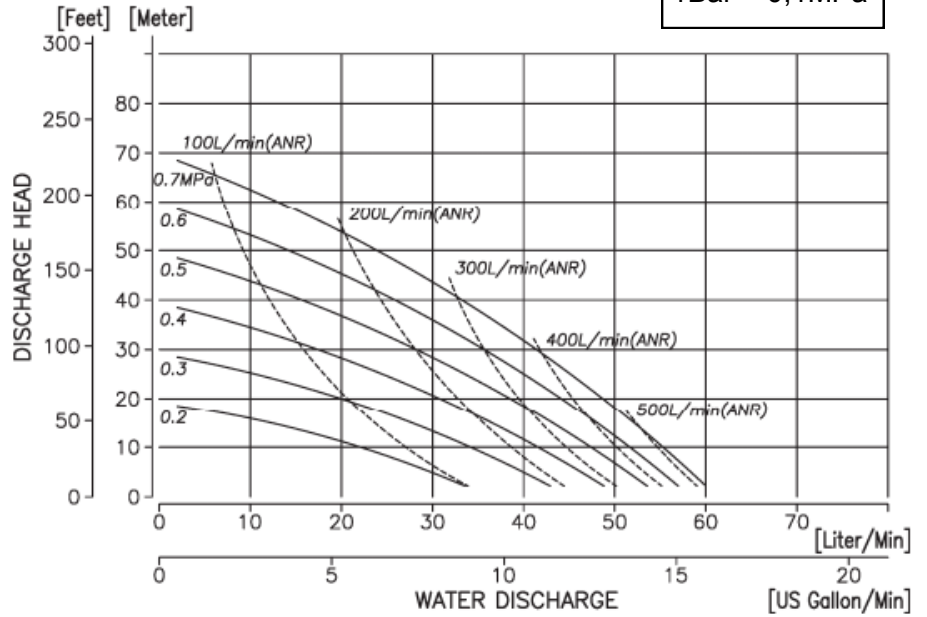

TECHNICAL DATA				Pump type G15AH00 / AS00			
Air supply pressure	0,2-0,7	MPa	Max. viscosity (neg. suc.)	500	Cp		
Max. discharge volume/cycle	160	ml	Max. viscosity (flooded suction.)	500	Cp		
Max. discharge volume	58	l/min	Max. air consumption	520	NL/min		
Max. discharge pressure	0,7	MPa	Max. noise level	77,5	dB(a)		
Max. size of solids	1	mm	Operating temp. ambient	0-70	°C		
Max. suction lift dry	PTFE fitted		Max operating temp. fluid				
Max. suction lift wet	PTFE fitted		Diaphragm compound	AH00 - TPEE	0 - 80	°C	
Max. fluid inlet pressure	PTFE fitted		Diaphragm compound	AS00 - TPO	0 - 100	°C	
Max. suction lift dry	Rubber fitted	2,5	Diaphragm compound				
Max. suction lift wet	Rubber fitted	4,0					
Max. fluid inlet pressure	Rubber fitted	0,1	MPa	Net Weight	Type A	ALU	5,4 Kg
Caution! Data based on water (1 Cp)							
Wetted parts: Pump chambers + manifolds				ADC12 - Aluminum			
Motor				ADC12 - Aluminum			

