


■ G15A□

1Bar = 0,1MPa



TECHNICAL DATA				Pump type G15AN00			
Air supply pressure	0,2-0,7	MPa	Max. viscosity (neg. suc.)	500	Cp		
Max. discharge volume/cycle	170	ml	Max. viscosity (flooded suction.)	500	Cp		
Max. discharge volume	60	l/min	Max. air consumption	520	NL/min		
Max. discharge pressure	0,7	MPa	Max. noise level	77,5	dB(a)		
Max. size of solids	1	mm	Operating temp. ambient	0-70	°C		
Max. suction lift dry	PTFE fitted		Max operating temp. fluid				
Max. suction lift wet	PTFE fitted		Diaphragm compound	AN00 - NBR	0 - 70	°C	
Max. fluid inlet pressure	PTFE fitted		Diaphragm compound				
Max. suction lift dry	Rubber fitted	3,5	Mtr	Diaphragm compound			
Max. suction lift wet	Rubber fitted	4,5	Mtr				
Max. fluid inlet pressure	Rubber fitted	0,1	MPa	Net Weight	Type A	ALU	5,4 Kg
Caution! Data based on water (1 Cp)							
Wetted parts: Pump chambers + manifolds				ADC12 - Aluminum			
Motor				ADC12 - Aluminum			

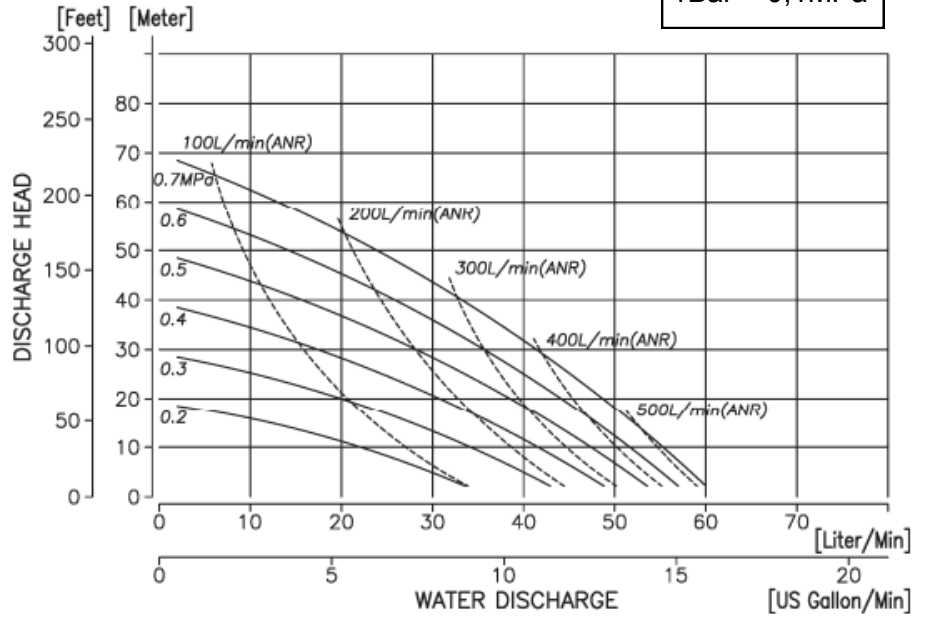