




### ■ G15AT

1Bar = 0,1MPa

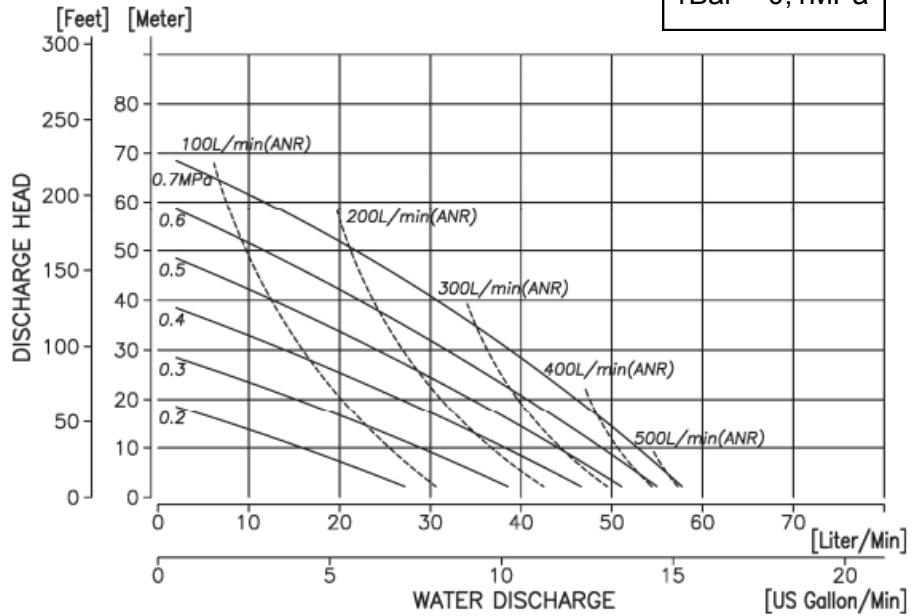

TECHNICAL DATA				Pump type G15AT00			
Air supply pressure	0,2-0,7	MPa	Max. viscosity (neg. suc.)	500	Cp		
Max. discharge volume/cycle	160	ml	Max. viscosity (flooded suction.)	500	Cp		
Max. discharge volume	58	l/min	Max. air consumption	520	NL/min		
Max. discharge pressure	0,7	MPa	Max. noise level	80,5	dB(a)		
Max. size of solids	1	mm	Operating temp. ambient	0-70	°C		
Max. suction lift dry	PTFE fitted	2,5	Mtr	<b>Max operating temp. fluid</b>			
Max. suction lift wet	PTFE fitted	4,0	Mtr	Diaphragm compound	AT00 - PTFE	0 - 100	°C
Max. fluid inlet pressure	PTFE fitted	0,03	Mpa	Diaphragm compound			
Max. suction lift dry	Rubber fitted			Diaphragm compound			
Max. suction lift wet	Rubber fitted						
Max. fluid inlet pressure	Rubber fitted			Net Weight	Type A	ALU	5,4 Kg
Caution! Data based on water (1 Cp)							
Wetted parts: Pump chambers + manifolds				ADC12 - Aluminum			
Motor				ADC12 - Aluminum			

