




■ G15S □

1Bar = 0,1MPa

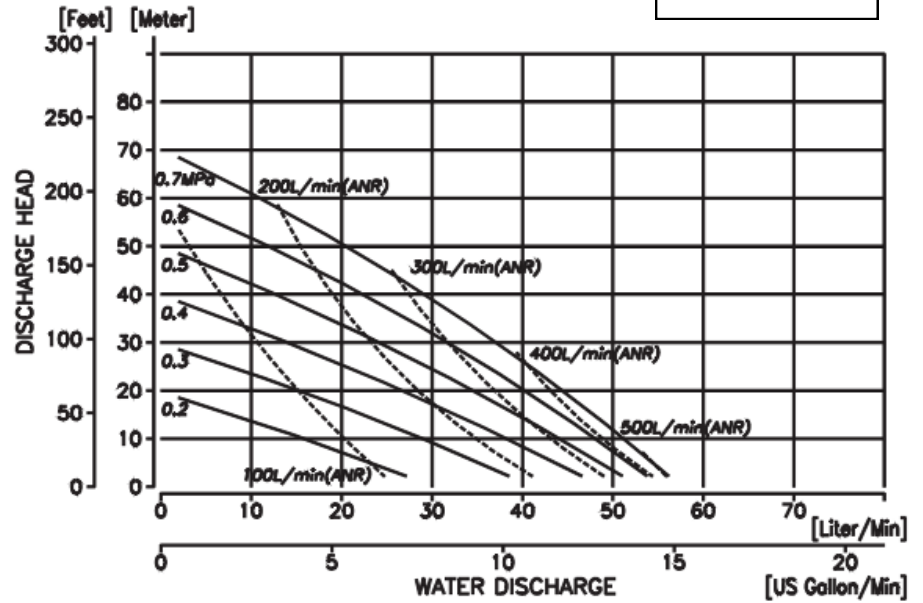

TECHNICAL DATA				Pump type G15SH00 / SN00 / SS00			
Air supply pressure	0,2-0,7	MPa		Max. viscosity (neg. suc.)	500	Cp	
Max. discharge volume/cycle	150	ml		Max. viscosity (flooded suction.)	500	Cp	
Max. discharge volume	56	L/min		Max. air consumption	510	NL/min	
Max. discharge pressure	0,7	MPa		Max. noise level	77,5	dB(a)	
Max. size of solids	1	mm		Operating temp. ambient	0-70	°C	
Max. suction lift dry	PTFE fitted			Max operating temp. fluid			
Max. suction lift wet	PTFE fitted			Diaphragm compound	AH00 - TPEE	0 - 80	°C
Max. fluid inlet pressure	PTFE fitted			Diaphragm compound	AN00 - TPO	0 - 70	°C
Max. suction lift dry	Rubber fitted	2,5	Mtr	Diaphragm compound	AS00 - TPO	0 - 100	°C
Max. suction lift wet	Rubber fitted	4,0	Mtr				
Max. fluid inlet pressure	Rubber fitted	0,1	Mpa	Net Weight	Type S	SUS	8,2 Kg
Caution! Data based on water (1 Cp) under ambient temperature							
Wetted parts: Pump chambers + manifolds				SCS14 - Stainless steel 316			
Motor				ADC12 - Aluminum			

